


Features and Components

Use: Designed in a waffle pattern for easy installation around any inside and outside corner.

Material: Flexible, non-reinforced TPO (thermoplastic polyolefin).

Colour: Grey, White

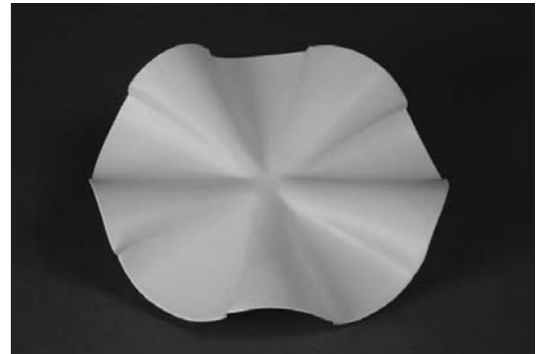

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS			
	HA	CA	CA	HW	HA	CA	HW	SA
	<i>Do not use in Multi-Ply systems</i>							


Single Ply	TPO		PVC		EPDM		
	MF	FA	MF	FA	MF	FA	BA
	<i>Used to seal non-standard penetrations in all Single Ply systems</i>						

Key: HA=Hot Applied CA=Cold Applied HW=Heat Weldable SA=Self Adhered MF=Mechanically Fastened FA=Fully Adhered BA=Ballasted

Warranty Information

Approved for use in any duroTUF TPO Membrane Warranty.

Installation/Application



Hot Air Weld

- Refer to the duroTUF TPO application instructions and detail drawings.

Packaging and Dimensions

Size (diameter)	15.2 cm diameter (waffle pattern)
Thickness	1.52mm

Storage

Storage Conditions	Store indoors, out of direct sunlight, and keep clean and dry prior to application.
--------------------	---

Refer to Waterproofing Systems Safety Data Sheet prior to using this product. The Safety Data Sheet is available on our website www.waterproofing.co.nz or phone: 09 579 1460 to request a copy.